


LED Knuckle Flood w/Photo Control

- Standard with dusk-to-dawn sensor and 1/2" BSPP-threaded mounting leg with 180° swivel range
- Aluminum matte bronze body with anti-UV polycarbonate lens
- Suitable for wet location
- Limited 5-year warranty

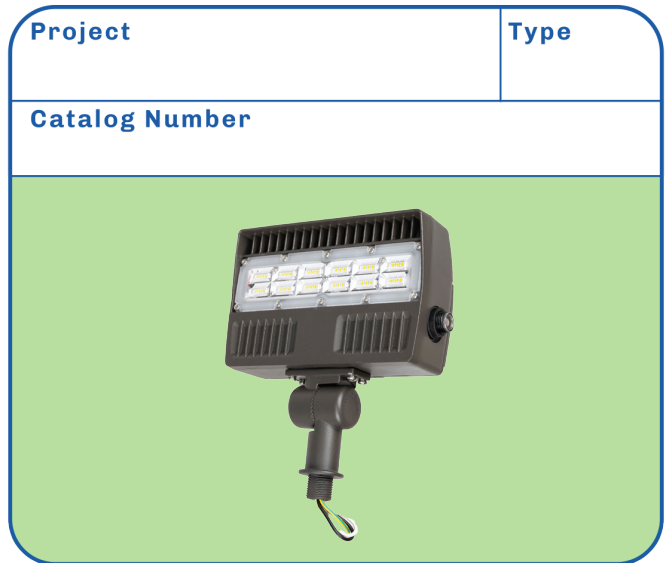

SPECIFICATIONS

Input Line Frequency _____ 60Hz
 Lamp Life (Rated) _____ 50,000Hrs
 Minimum Starting Temp _____ -40°C
 Maximum Operating temp _____ 40°C
 CRI _____ 70

DIMENSIONS

E1FLKXXL750 _____ 8.5" x 7.8" x 2.3"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
20	E1FLK20L750	2,080	5000	120-277	50W MH
30	E1FLK30L750	3,050	5000	120-277	75W MH

NOTES:

Manufactured by

energetic
Smarter lighting