


LED Retrofit Troffer Kit

- Easy and secure installation
- Ribbed optic diffuser for glare free illumination
- Suitable for damp locations
- 110° beam angle
- DLC 3.0 Premium qualified
- 5-year limited warranty

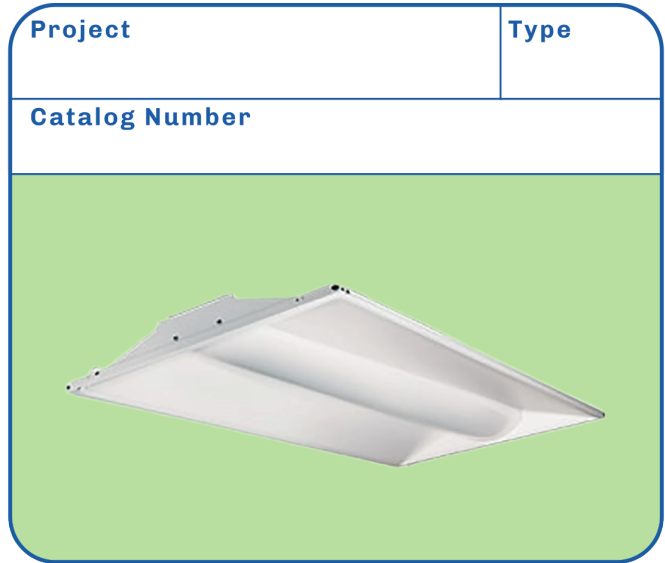

SPECIFICATIONS

Input Line Frequency _____ 50/60Hz
 Lamp Life (Rated) _____ 50,000Hrs
 Minimum Starting Temp _____ -10°C
 Maximum Operating temp _____ 50°C
 CRI _____ 80
 Power Factor _____ 0.9
 THD _____ 10%
 Dimmable _____ 0-10V

DIMENSIONS

ELYRTDX2X2CD _____ 23.9" x 23.9" x 3.1"
 ELYRTDX2X4CD _____ 47.9" x 23.9" x 3.1"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
25	ELYRTD32X2CD	3,200	4000	120-277	2 x 32W
25	ELYRTD32X4CD	3,300	4000	120-277	2 x 32W
30	ELYRTD42X2CD	3,900	4000	120-277	3 x 32W
36	ELYRTD42X4CD	4,800	4000	120-277	3 x 32W

NOTES:

Manufactured by

energetic
Smarter lighting