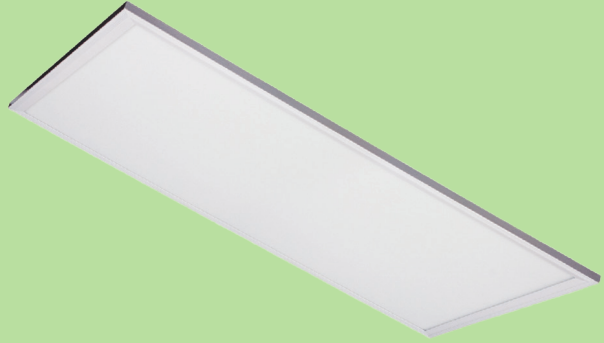


LED Premium Panel

- Mercury-free construction
- Standard T-grid drop ceiling installation
- Suitable for damp location
- 5-year limited warranty

Project	Type
Catalog Number	
	

SPECIFICATIONS

Input Line Frequency _____ 50/60Hz
 Lamp Life (Rated) _____ 50,000Hrs
 Minimum Starting Temp _____ -10°C
 Maximum Operating temp _____ 50°C
 CRI _____ 84
 Power Factor _____ 0.89
 THD _____ 13%
 Dimmable _____ 10% 0-10V

DIMENSIONS

E2PL2A30D840 _____ 23.8" x 23.8" x 2.0"
 E4PL4A36D840 _____ 47.8" x 23.8" x 2.0"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
30	E2PL2A30D840	3,888	4000	120-277	2/3 x 32W
36	E4PL4A36D840	5,059	4000	120-277	3/4 x 32W

NOTES:

Manufactured by

energetic
Smarter lighting