


LED Undercabinet (Dual Kelvin)

- Powder-coated white finish and opal glass diffuser
- Integrated switch changes light temperature between warm white and cool white
- High color rendering chip for vivid, true color
- Includes linking cord and butt connector, hard wire connection, and 5' plug-in cord.
- Hardwire box with switch and link (UL4HWS) and 12" linking cord (UL412LINK) sold separately
- 3-year limited warranty

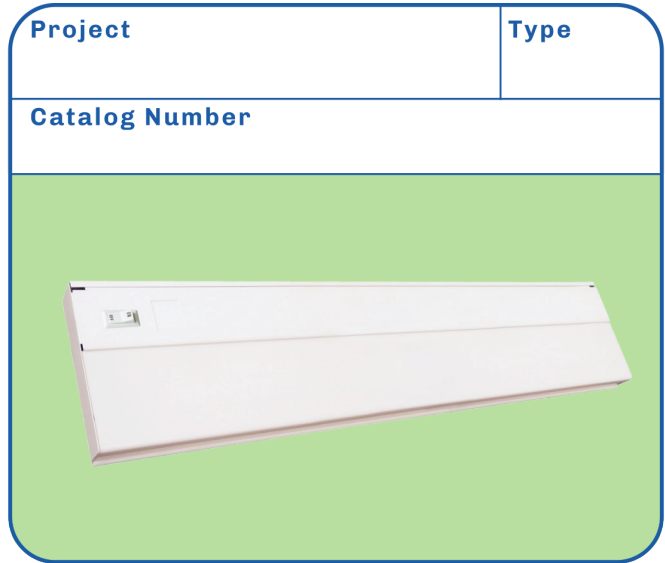

SPECIFICATIONS

Input Line Frequency _____ 60Hz
 Lamp Life (Rated) _____ 25,000Hrs
 Minimum Starting Temp _____ -20°C
 Maximum Operating temp _____ 40°C
 CRI _____ ≥90
 Dimmable _____ Triac 120V

DIMENSIONS

UL094DCT _____ 9" x 3.63" x 1"
 UL124DCT _____ 12" x 3.63" x 1"
 UL184DCT _____ 18" x 3.63" x 1"
 UL244DCT _____ 24" x 3.63" x 1"
 UL324DCT _____ 32" x 3.63" x 1"
 UL404DCT _____ 40" x 3.63" x 1"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
3	UL094DCT	270	30/40K	120	25W HAL
5	UL124DCT	270	30/40K	120	50W HAL
8	UL184DCT	450	30/40K	120	75W HAL
12	UL244DCT	650	30/40K	120	100W HAL
16	UL324DCT	880	30/40K	120	125W HAL
20	UL404DCT	1,100	30/40K	120	150W HAL
ACCESSORIES:	UL4HWS				
	UL412LINK				
NOTES:					

Manufactured by

