


- Non-corrosive powder coated steel body
- Polycarbonate plastic lens
- Instant-on
- 2-year limited warranty

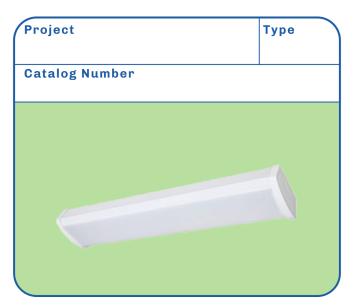

SPECIFICATIONS

Input Line Frequency	60Hz
Lamp Life (Rated)	50,000Hrs
Minimum Starting Temp	20°C
Maximum Operating temp	40°C
CRI	≥80

DIMENSIONS

C2405WLED	2	24.5"	Χ	5.4''	Χ .	2.5	·''
C4805WLED		47.5"	Χ	5.4"	Χ .	2.5	·'



WATTS	MODEL NO.	LUMENS	ССТ	VOLTAGE	REPLACES
20	C2405WLED	1,400	4000	120-277	2 x 17W
40	C4805WLED	3,200	4000	120-277	2 x 32W
NOTES:					

Manufactured by



