


LED Premium Area Light

- Uses 1/5 of wattage compared to equivalent MH
- Bronze-finish die cast aluminum
- Polycarbonate lens
- Slipfitter included standard
- Suitable for wet location (IP65)
- Beam pattern Type III default
- 10-year limited warranty

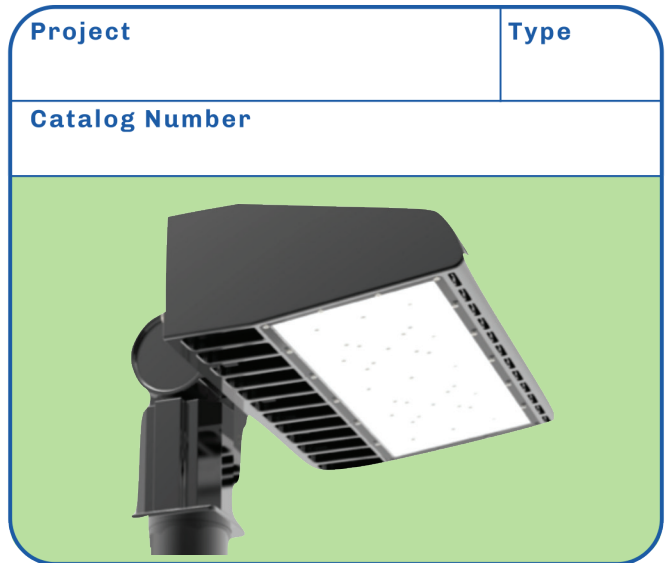

SPECIFICATIONS

Input Line Frequency _____ 50/60Hz
 Lamp Life (Rated) _____ Hrs
 Minimum Starting Temp _____ -30°C
 Maximum Operating temp _____ 130°C
 CRI _____ ≥80
 Power Factor _____ .99
 THD _____ 15%

DIMENSIONS

AELALASXXX _____ 9.1" x 13.0" x 3.9"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
35	AELALAS35	4,800	5000	120-277	175W MH
50	AELALAS50	7,000	5000	120-277	250W MH
100	AELALAS100	12,212	5000	120-277	500W MH
150	AELALAS150	19,500	5000	120-277	750W MH

NOTES:

Manufactured by

ALTECH
ELECTRONICS

LITECO INC

www.litecoinc.com