


LED Flood with Trunion

- Die-cast aluminum with black finish and glass lens
- 120W and 150W units are dimmable (1-10VDC or PWM signal or resistance)
- Suitable for wet locations (IP65)
- 5-year limited warranty

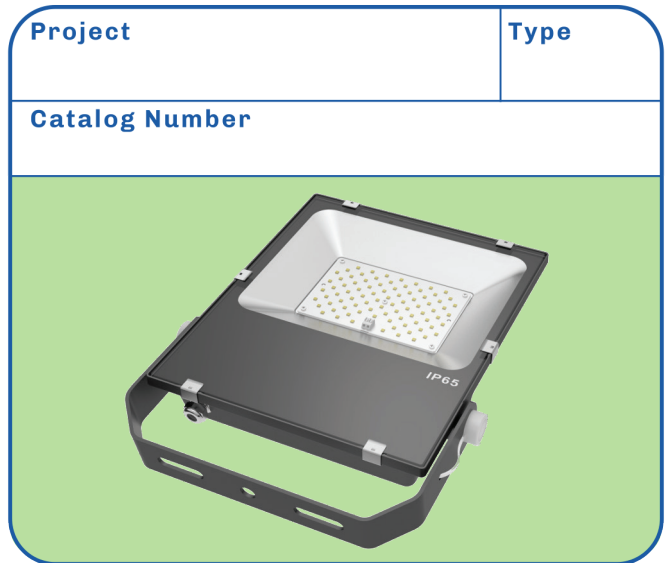

SPECIFICATIONS

Input Line Frequency _____ 50/60Hz
 Lamp Life (Rated) _____ 100,000Hrs
 Minimum Starting Temp _____ -30°C
 Maximum Operating temp _____ 130°C
 CRI _____ ≥70
 Power Factor _____ .99
 THD _____ 15%

DIMENSIONS

AELFLIS40 _____ 6.6" x 8.9" x 1.6"
 AELFLIS60 _____ 8.7" x 12.2" x 1.9"
 AELFLIS90 _____ 9.6" x 13.9" x 2.2"
 AELFLIS120 _____ 11.6" x 15.8" x 2.4"
 AELFLIS150 _____ 11.6" x 16.9" x 2.4"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
40	AELFLIS40	4,800	5000	120-277	150W MH
60	AELFLIS60	7,200	5000	120-277	200W MH
90	AELFLIS90	10,800	5000	120-277	320W MH
120	AELFLIS120	14,400	5000	120-277	480W MH
150	AELFLIS150	18,000	5000	120-277	600W MH

NOTES:

Manufactured by

ALTECH
ELECTRONICS

LITECO INC

www.litecoinc.com