


LED Low Profile Wall Pack

- Uses 1/5 of wattage compared to equivalent MH
- Bronze-finish die cast aluminum
- Polycarbonate lens
- Suitable for wet location (IP65)
- Beam pattern Type III default
- 10-year limited warranty

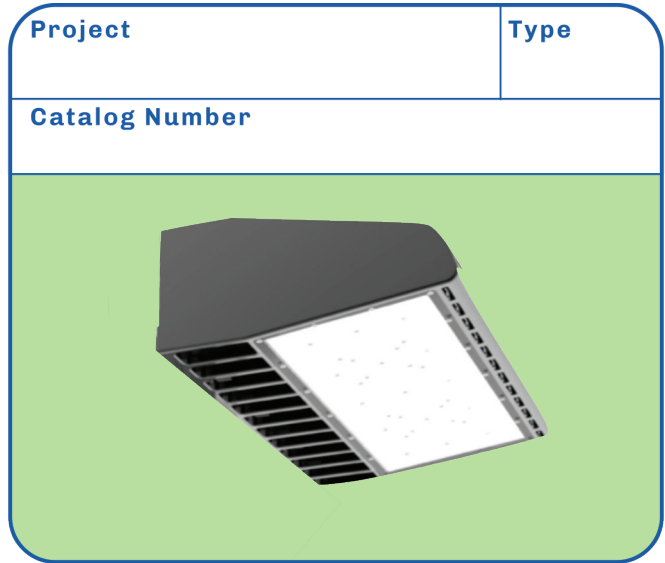

SPECIFICATIONS

Input Line Frequency _____ 50/60Hz
 Lamp Life (Rated) _____ Hrs
 Minimum Starting Temp _____ -34.4°C
 Maximum Operating temp _____ 48.9°C
 CRI _____ ≥80
 Power Factor _____ .99
 THD _____ 15%
 Dimmable ____ 1-10VDC or PWM signal or resistance

DIMENSIONS

AELWPLPXXX 9.1" x 13.0" x 3.9"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
24	AELWPLP24	2,640	5000	120-277	100W MH
80	AELWPLP80	8,800	5000	120-277	375W MH
100	AELWPLP100	11,000	5000	120-277	500W MH

NOTES:

Manufactured by

ALTECH
ELECTRONICS

LITECO INC

www.litecoinc.com