


- Polycarbonate construction with stainless steel clips
- Instant start electronic unit
- Non-corrosive, flame and vandal resistant
- Includes pre-installed 18W LED lamps
- Wet location vapor tight
- 5-year limited warranty

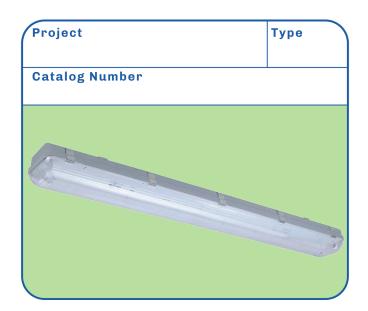

SPECIFICATIONS

Input Line Frequency	60Hz
Lamp Life (Rated)	50,000Hrs
Minimum Starting Temp	20°C
Maximum Operating temp	40°C
CRI	≥80

DIMENSIONS

C48232VPLED ______ 50" x 5.31" x 3.98"



WATTS	MODEL NO.	LUMENS	ССТ	VOLTAGE	REPLACES
36	C48232VPLED	3,200	4000	120-277	2 x 32W
NOTES:					

Manufactured by



