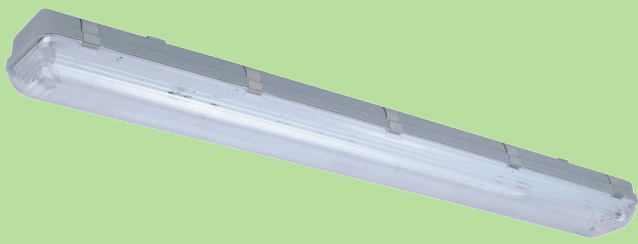


# LED Vapor Tight (Dimming)

- Instant-on flat panel LED
- Polycarbonate construction with stainless steel clips
- Non-corrosive, flame and vandal resistant
- Wet location vapor tight
- 5-year limited warranty

Project	Type
Catalog Number	
	

## SPECIFICATIONS

Input Line Frequency \_\_\_\_\_ 60Hz  
 Lamp Life (Rated) \_\_\_\_\_ 50,000Hrs  
 Minimum Starting Temp \_\_\_\_\_ -20°C  
 Maximum Operating temp \_\_\_\_\_ 40°C  
 CRI \_\_\_\_\_ ≥80  
 Power Factor \_\_\_\_\_ <.90  
 THD \_\_\_\_\_ 20%  
 Dimmable \_\_\_\_\_ 10% 0-10V

## DIMENSIONS

C4840VPLED850 \_\_\_\_\_ 50" x 5.31" x 3.98"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
40	C4840VPLED850	5,000	5000	120-277	2/3 x 32W
NOTES:					

Manufactured by

