

LED



50,000 Hours Life, 48 Watt, 120-277VAC 60Hz

Applications:

Garages, Carports, Laundry Room, Walk Ways, Car Wash/
Track Wash, Food Processing Plant, Freezers, Barns
Fair Ways, Outdoor Locations

Features:

- Instant On Flat Panel LED
- 10%0-10V Dimmable
- 50,000 Hour Life
- Polycarbonate Construction.
- Non-Corrosive, Flame and vandal resistant
- Stainless Steel Clips
- Wet Locations Vapor Tight

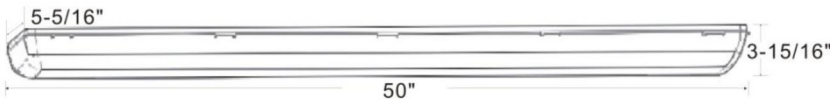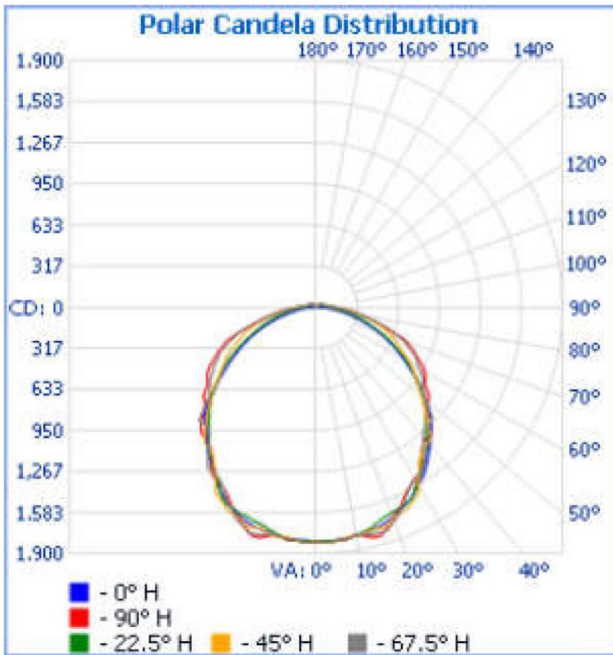

Catalog Number

Notes

Type



Specification:

Input Line Voltage..... 120-277VAC
 Input Power..... 48W
 Input Line Frequency 60Hz
 Lamp Life (Rated) 50,000hrs
 Minimum Starting Temp -20°C/-4°F
 Maximum Operating Temp 40°C/104°F
 CCT 4000K/5000K
 CRI 80
 Lumens 5000
 CBCP 1643
 Dimmable 10%0-10V

	Illuminance at a Distance	
	Center Beam LUX	Beam Width
0.7M	4,059.00 LUX	1.8M 2.5M
1.3M	1,014.75 LUX	3.6M 5.0M
2.0M	451.00 LUX	5.4M 7.4M
2.7M	253.69 LUX	7.2M 9.9M
3.3M	162.36 LUX	9.0M 12.4M
4.0M	112.75 LUX	10.8M 14.9M

■ Vert. Spread: 107.1° ■ Horiz. Spread: 123.4°

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

WARRANTY

5-YEAR

Model:#	Description	wattage	lumens
C4840VP-LED/840	48 Watt 4Ft LED Vapor Tight Fixture Cool White	48	5000
C4840VP-LED/850	48 Watt 4Ft LED Vapor Tight Fixture Day Light	48	5000

* 5 Year Limited Warranty