


2x2 Recessed Direct/Indirect

- Instant On LED
- Replaces 3&4 lamp fluorescent troffer
- White framed edge
- Low profile design
- Non-corrosive powder coated steel body
- Includes earthquake clips
- Optional Backup battery (CLBATBACKUP) sold separately



Input Line Frequency _____ 60Hz
 Lamp Life (Rated) _____ 50,000Hrs
 Minimum Starting Temp _____ -20°C
 Maximum Operating temp _____ 40°C
 CRI _____ ≥80
 Power Factor _____ <0.90
 THD _____ 20%
 Dimmable _____ 10% 0-10V

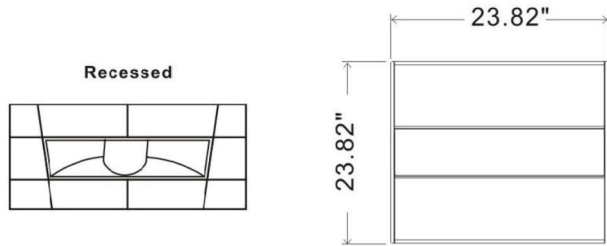

WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE
36	CL36IDTF22CW	3600	4000	120-277
NOTES:				

Manufactured by

