


# 2x4 Recessed Direct/Indirect

- Instant On LED
- Replaces 3&4 lamp fluorescent troffer
- White framed edge
- Low profile design
- Non-corrosive powder coated steel body
- Includes earthquake clips
- Optional Backup battery (CLBATBACKUP) sold separately



Input Line Frequency \_\_\_\_\_ 60Hz  
 Lamp Life (Rated) \_\_\_\_\_ 50,000Hrs  
 Minimum Starting Temp \_\_\_\_\_ -20°C  
 Maximum Operating temp \_\_\_\_\_ 40°C  
 CRI \_\_\_\_\_ ≥80  
 Power Factor \_\_\_\_\_ <0.90  
 THD \_\_\_\_\_ 20%  
 Dimmable \_\_\_\_\_ 10% 0-10V

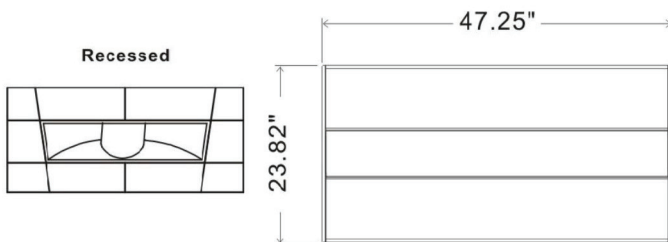

WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE
50	CL50IDTF24CW	5000	4000	120-277
NOTES:				

Manufactured by

