



2x4 Panel

- Instant-on LED
- Replaces 3&4 lamp fluorescent troffer
- Junction box for easy connection
- White framed edge
- Aircraft cable suspension kit (CLAC-KIT) sold separately

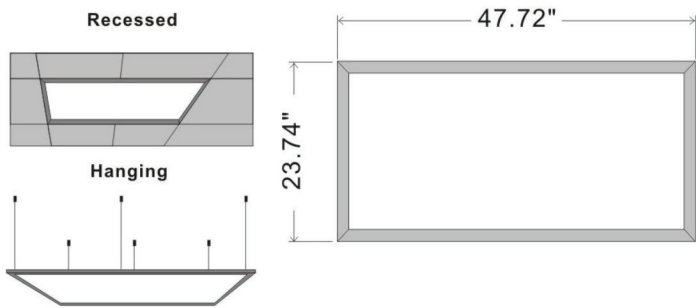

Input Line Frequency _____ 60Hz
 Lamp Life (Rated) _____ 50,000Hrs
 Minimum Starting Temp _____ -20°C
 Maximum Operating temp _____ 40°C
 CRI _____ ≥80
 Power Factor _____ <0.90
 THD _____ 20%
 Dimmable _____ 10% 0-10V

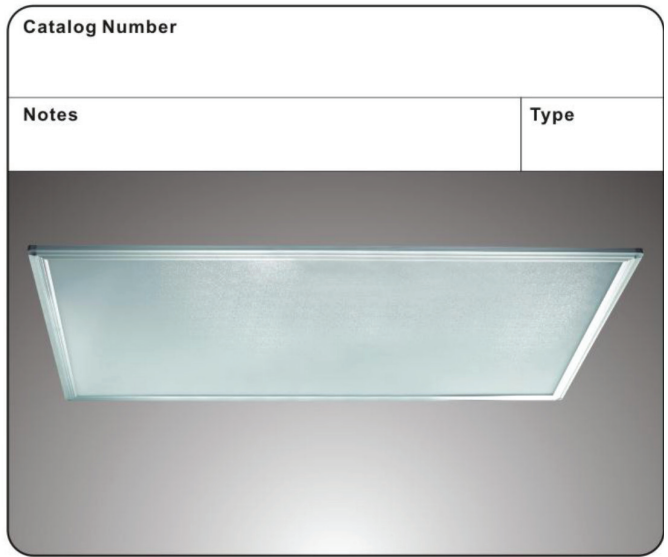

WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE
50	CL50P24DCW	4500	4000	120-277
NOTES:				

Manufactured by

