
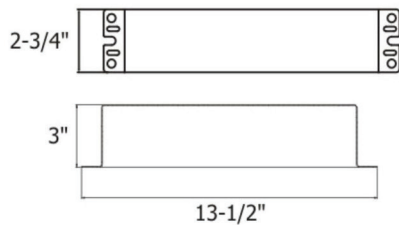


Remote Battery System

- Includes test switch and charge indicator accessory kit
- Operates fixture at full light output for 50W max at 90 minutes
- Contains battery, charger and special converter circuit in a single housing
- UL Conditions of Acceptability: battery temperature must not exceed 50°C

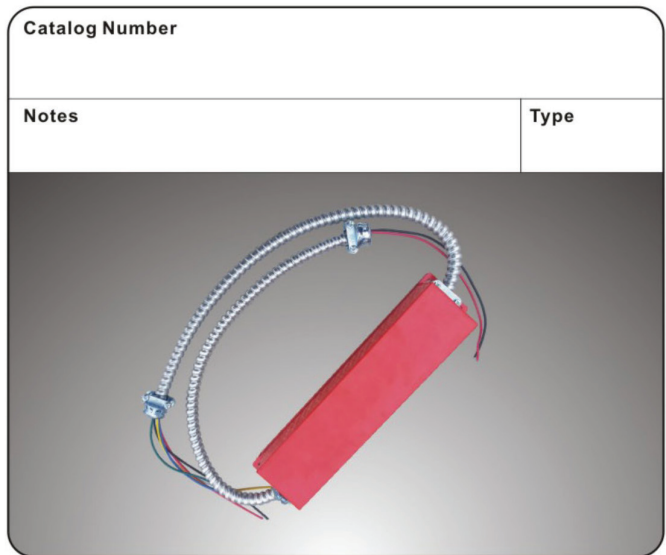

Output Voltage _____ 170VDC/120VAC
 Input Line Frequency _____ 50/60Hz
 Minimum Starting Temp _____ 0°C
 Maximum Operating temp _____ 50°C
 Battery Type _____ high temp NiCad
 Battery Life _____ 7-10Yrs
 Recharge Time _____ 24Hrs

WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE
50	CLBATBACKUP	FULL OUTPUT		120-277
NOTES:				

Manufactured by

