


LED Troffer

- Low profile design
- Non-corrosive powder coated steel body
- Includes earthquake clips
- Optional backup battery (CLBATBACKUP) sold separately - see page 80
- 5-year limited warranty

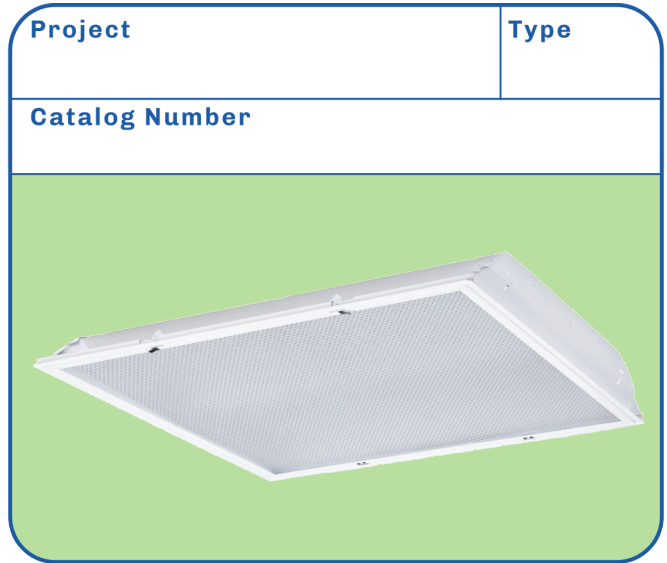

SPECIFICATIONS

Input Line Frequency _____ 50/60Hz
 Lamp Life (Rated) _____ 50,000Hrs
 Minimum Starting Temp _____ -20°C
 Maximum Operating temp _____ 40°C
 CRI _____ ≥80
 Power Factor _____ <.90
 THD _____ 20%
 Dimmable _____ 0-10V

DIMENSIONS

CL40TF22DCW _____ 23.82" x 23.81" x 2.75"
 CL45TF24DCW _____ 47.44" x 23.81" x 2.75"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
40	CL40TF22DCW	4,200	4000	120-277	2/3 x 32W
45	CL45TF24DCW	5,200	4000	120-277	3/4 x 32W
ACCESSORIES:	CLBATBACKUP				

Manufactured by

