


LED Retrofit Troffer Kit

- Non-corrosive powder-coated finish
- Flush door frame with polycarbonate lens
- Quick 10-minute install
- 5-year limited warranty

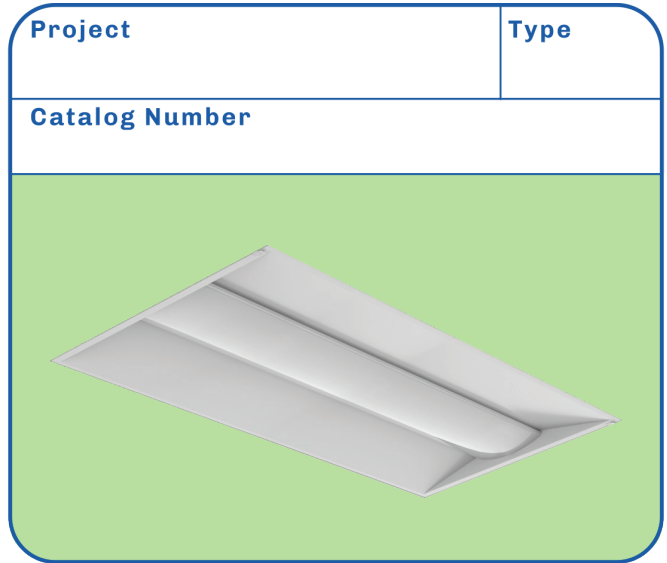

SPECIFICATIONS

Input Line Frequency _____ 50/60Hz
 Lamp Life (Rated) _____ 50,000Hrs
 Minimum Starting Temp _____ -20°C
 Maximum Operating temp _____ 40°C
 CRI _____ ≥80
 Power Factor _____ <.90
 THD _____ 10%
 Dimmable _____ 0-10V

DIMENSIONS

CL22TFK22840 _____ 22.56" x 22.56" x 3.19"
 CL36TFK24840 _____ 45.47" x 22.56" x 3.19"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
22	CL22TFK22840	2,750	4000	120-277	3 x 17W
36	CL36TFK24840	4,500	4000	120-277	3 x 32W

NOTES:

Manufactured by

