


LED Ringed Ceiling Light

- Instant start electronic unit
- LED module provides smooth, even light
- High color rendering chip for vivid, true color
- Nickel satin fixture with opal lens
- Environment-friendly packaging
- Limited 3-year warranty

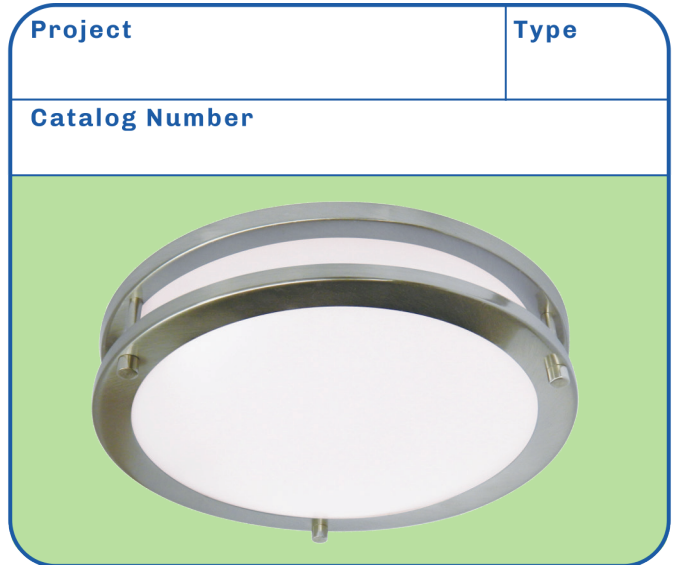

SPECIFICATIONS

Input Line Frequency _____ 60Hz
 Lamp Life (Rated) _____ 25,000Hrs
 Minimum Starting Temp _____ -20°C
 Maximum Operating temp _____ 40°C
 CRI _____ ≥90
 Dimmable _____ Triac 120V

DIMENSIONS

C15SATNSLED _____ 12" x 12" x 3"
 C23SATNSLED _____ 16" x 16" x 4"



| WATTS | MODEL NO. | LUMENS | CCT | VOLTAGE | REPLACES |
|-------|-------------|--------|------|---------|----------|
| 15 | C15SATNSLED | 800 | 3000 | 120 | 60W INC |
| 23 | C23SATNSLED | 1,200 | 3000 | 120 | 100W INC |

NOTES:

Manufactured by

