


# LED Vapor Tight

- Instant-on flat panel LED
- Polycarbonate construction with stainless steel clips
- Non-corrosive, flame and vandal resistant
- Wet location vapor tight
- 5-year limited warranty

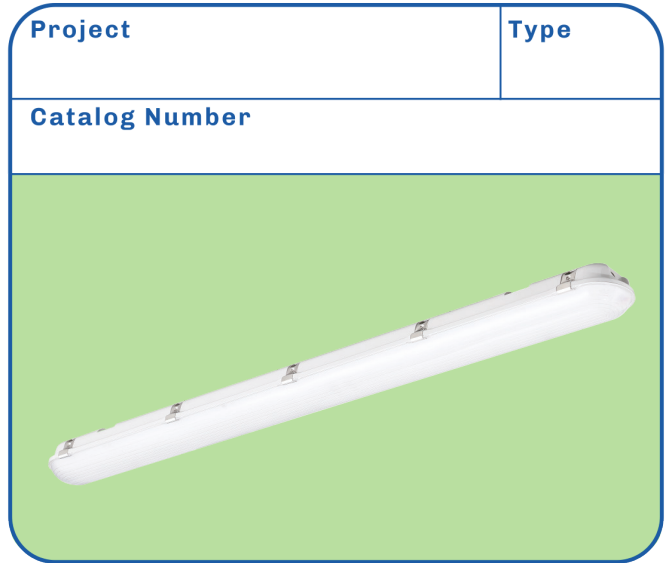

## SPECIFICATIONS

Input Line Frequency \_\_\_\_\_ 60Hz  
 Lamp Life (Rated) \_\_\_\_\_ 50,000Hrs  
 Minimum Starting Temp \_\_\_\_\_ -20°C  
 Maximum Operating temp \_\_\_\_\_ 40°C  
 CRI \_\_\_\_\_ ≥80  
 Power Factor \_\_\_\_\_ <.90  
 THD \_\_\_\_\_ 20%  
 Dimmable \_\_\_\_\_ 10% 0-10V

## DIMENSIONS

C4840SVPLED850 \_\_\_\_\_ 48.5" x 4.0" x 3.0"  
 C9665SVPLED850 \_\_\_\_\_ 96.0" x 4.0" x 3.19"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
40	C4840SVPLED850	5,200	5000	120-277	2/3 x 32W
65	C9665SVPLED850	8,450	5000	120-277	4 x 32W

NOTES:

Manufactured by

