


# LED Exit Combo (White)

- Fully adjustable glare-free heads
- 90-minute emergency operation
- Push-to-test switch and charge indicator
- Ni-Cad premium battery
- Field replaceable snap-in/out directional chevron
- Universal mounting pattern knockout in backplate for J-box mounting
- Snap fit construction speeds installation
- Suitable for damp locations
- 5-year limited warranty

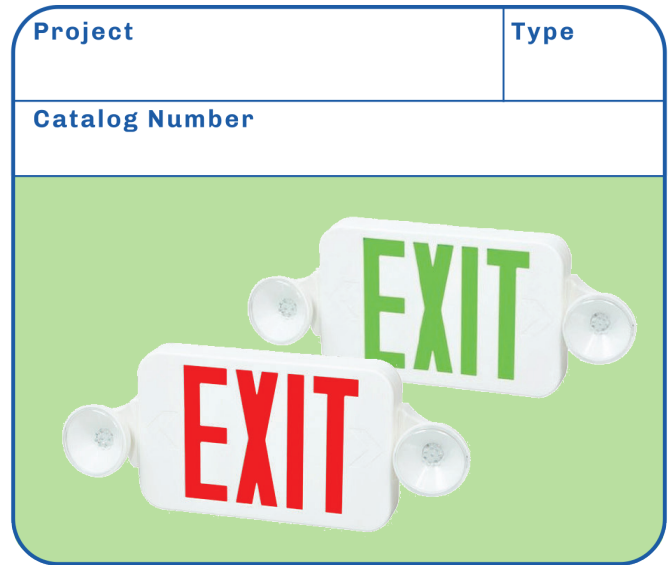

## SPECIFICATIONS

Input Line Frequency \_\_\_\_\_ 60Hz  
 Lamp Life (Rated) \_\_\_\_\_ 50,000Hrs  
 Minimum Starting Temp \_\_\_\_\_ -20°C  
 Maximum Operating temp \_\_\_\_\_ 30°C

## DIMENSIONS

E2FLEDXXX \_\_\_\_\_ 17.9" x 8.2" x 4.3"

WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
7	E2FLEDXGR	150	5700	120-277	-
7	E2FLEDXRD	150	5700	120-277	-
NOTES:					

Manufactured by

