


LED Exit Combo (Black)

- Fully adjustable glare-free heads
- 90-minute emergency operation
- Push-to-test switch and charge indicator
- Ni-Cad premium battery
- Field replaceable snap-in/out directional chevron
- Universal mounting pattern knockout in backplate for J-box mounting
- Snap fit construction speeds installation
- Suitable for damp locations
- 5-year limited warranty

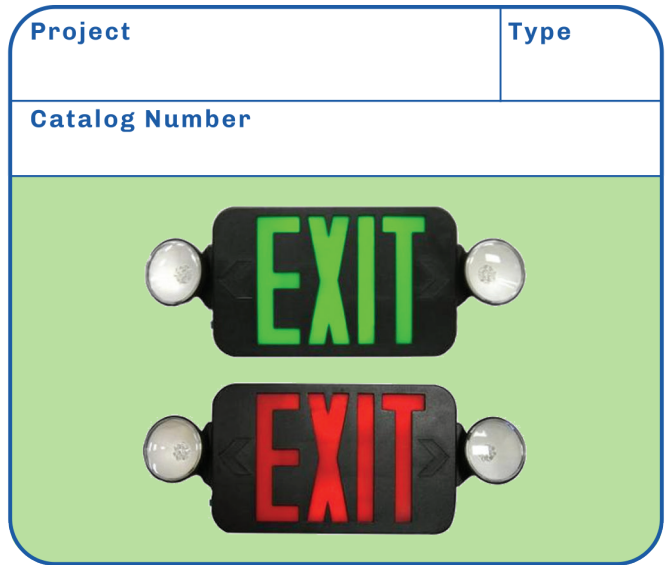

SPECIFICATIONS

Input Line Frequency _____ 60Hz
 Lamp Life (Rated) _____ 50,000Hrs
 Minimum Starting Temp _____ -20°C
 Maximum Operating temp _____ 30°C

DIMENSIONS

FHEC30XX _____ 17.9" x 8.2" x 4.3"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
7	FHEC30BG	150	5700	120-277	-
7	FHEC30BR	150	5700	120-277	-

NOTES:

Manufactured by

