

FHEX25 Series

Project: _____ Type: _____ Model No.: _____

Remarks: _____

Specification:

Lamp Type	LED	
Lamp Wattage	Red	120VAC, 60Hz, 0.028A, 3.2W
		277VAC, 60Hz, 0.011A, 3.0W
	Green	120VAC, 60Hz, 0.029A, 3.8W
		277VAC, 60Hz, 0.014A, 3.6W
Emergency Operation	90 minutes	


Listings & Certification:



Model: FHEX25



Mechanical Data:

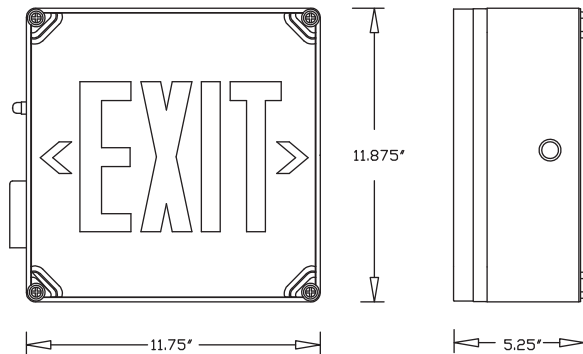

Standard Features:

- Push-To-Test Switch
- LED Charge Indicator
- Ni-Cad Premium Battery
- Dual Voltage 120V/277V
- Long Life Energy Saving Led Light Source
- AC and EM Models
- Field Selectable Chevron Directional Indicator Punch-Outs
- Sealed and Gasketed Housing
- Integral Breather Vent
- Resistant to Corrosive Atmospheres, Non-Hazardous Dust Environments, Frequent Hose-Downs, Water Spray or Splashing Water.

Ordering Information:

Base Model No.	Letter Color	Operation
FHEX25	R - Red	AC - AC Only
	G - Green	EM - Battery Backup

Build part number by adding Base Model No., one of each Letter Color and Operation codes.
 Example: FHEX25-R-EM