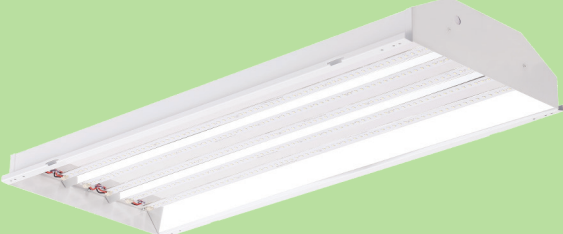


LED High Bay

- Built in heavy duty Y-hangers with 3' chain
- Non-corrosive powder coated steel body
- Drivers located on easy access hinge door
- Optional frosted lens (HL26LENS/HL32LENS) sold separately
- 5-year limited warranty

Project	Type
Catalog Number	
	

SPECIFICATIONS

Input Line Frequency _____ 60Hz
 Lamp Life (Rated) _____ 50,000Hrs
 Minimum Starting Temp _____ -20°C
 Maximum Operating temp _____ 40°C
 CRI _____ ≥80
 Power Factor _____ <0.90
 THD _____ 10%
 Dimmable _____ 10% 0-10V

DIMENSIONS

HL10026P850 _____ 26" x 12.5" x 3.62"
 HL15032P850 _____ 32.28" x 13.7" x 3.62"
 HL21032P850 _____ 32.28" x 13.7" x 3.62"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
100	HL10026P850	13,000	5000	120-277	250W MH
150	HL15032P850	19,000	5000	120-277	400W MH
210	HL21032P850	26,500	5000	120-277	750W MH
ACCESSORIES:	HL26LENS				
	HL32LENS				
NOTES:					

Manufactured by

