
2' T8 LED Lamp

- Single direction of illumination reduces up-light wastage
- Can be operated in luminaire with or without diffuser
- No UV or infrared radiation
- All in one operates on most ballasts as well as direct power





| Input Line Frequency | 60Hz |
|------------------------|-----------|
| Lamp Life (Rated) | 50,000Hrs |
| Minimum Starting Temp | 20°C |
| Maximum Operating temp | 50°C |
| CRI | ≥80 |

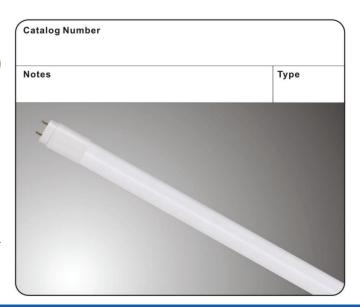



| MODEL NO. | LUMENS | ССТ | VOLTAGE |
|--------------|--------------|--------------------|-------------------------|
| LB24T8PNP830 | 1,000 | 3000 | 120-277 |
| LB24T8PNP840 | 1,000 | 4000 | 120-277 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | LB24T8PNP830 | LB24T8PNP830 1,000 | LB24T8PNP830 1,000 3000 |

Manufactured by





