


# LED PL Dual Mode (2 and 4 Pin)

- Instant bright high power LED
- Rotating base
- Contains no mercury
- Operates on existing fluorescent electronic and magnetic ballast or direct wire
- No UV or infrared radiation
- 3-year limited warranty

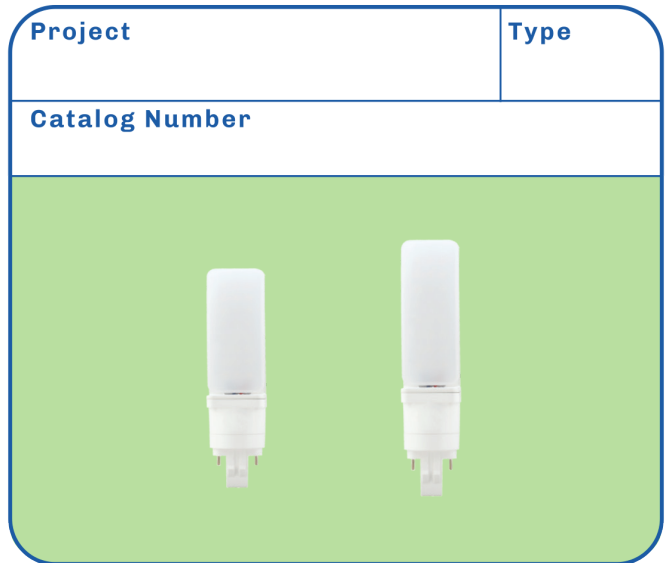

## SPECIFICATIONS

Input Line Frequency \_\_\_\_\_ 60Hz  
 Lamp Life (Rated) \_\_\_\_\_ 25,000Hrs  
 Minimum Starting Temp \_\_\_\_\_ -20°C  
 Maximum Operating temp \_\_\_\_\_ 40°C  
 CRI \_\_\_\_\_ ≥80

## DIMENSIONS

LB7PLMXX (2 pin) \_\_\_\_\_ 1.5" x 6.0" x 1.25"  
 LB11PLHXX (4 pin) \_\_\_\_\_ 1.4" x 7.03" x 1.4"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
7	LB7PLMWW	700	2700	120-277	13W CFL
7	LB7PLMCW	700	4000	120-277	13W CFL
12	LB11PLHWW	1,100	2700	120-277	26W CFL
12	LB11PLHCW	1,150	4000	120-277	26W CFL

NOTES:

Manufactured by

