
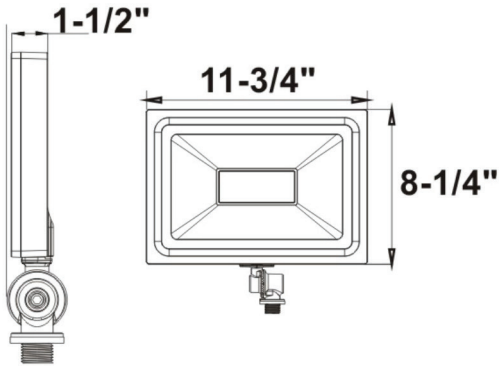


FloodLight (50W)

- Aluminum rust-proof body
- Instant start electronic unit
- Suitable for wet location (IP65)
- Water-tight wire connector included
- Wall mount with junction box or canopy threads are 3/4" on 1/2" pipe

Project	Type
Catalog Number	
	



Input Line Frequency _____ 60Hz
 Lamp Life (Rated) _____ 50,000Hrs
 Minimum Starting Temp _____ -20°C
 Maximum Operating temp _____ 40°C
 CRI _____ ≥80



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE
50	LF50BZDL	5,000	5000	120-277
NOTES:				

Manufactured by

