


LED Wall Cylinder

- Integrated 15W LED
- Rugged corrosion-resistant cast aluminum housing
- Fixture can be mounted to project light up or down
- Tempered glass lens
- Outdoor wet location
- 5-year limited warranty

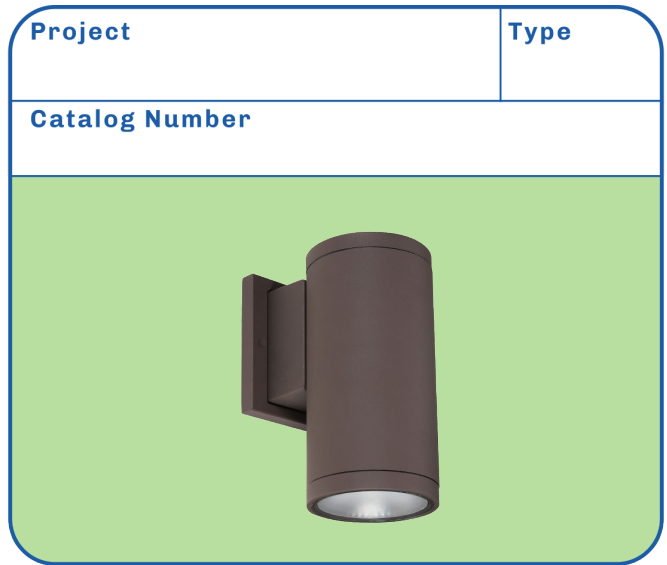

SPECIFICATIONS

Input Line Frequency _____ 60Hz
 Lamp Life (Rated) _____ 50,000Hrs
 Minimum Starting Temp _____ -20°C
 Maximum Operating temp _____ 45°C
 CRI _____ ≥80
 Dimmable _____ Triac 120V

DIMENSIONS

LWP15TDNBZXXX _____ 8" x 4" x 5.81"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
15	LWP15TDNBZ830	1,100	3000	120	50W MH
15	LWP15TDNBZ850	1,100	5000	120	50W MH

NOTES:

Manufactured by

