


LED Up and Down Wall Cylinder

- Integrated 30W LED
- Rugged corrosion-resistant cast aluminum housing
- Fixture projects light up and down
- Tempered glass lens
- Outdoor wet location
- 5-year limited warranty

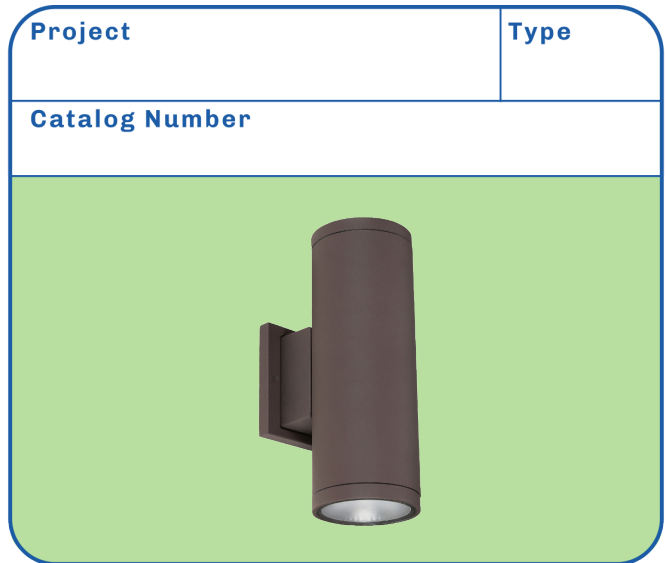

SPECIFICATIONS

Input Line Frequency _____ 60Hz
 Lamp Life (Rated) _____ 50,000Hrs
 Minimum Starting Temp _____ -20°C
 Maximum Operating temp _____ 45°C
 CRI _____ ≥80
 Dimmable _____ Triac 120V

DIMENSIONS

LWP30TUDNBZXXX _____ 12" x 4" x 5.81"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
30	LWP30TUDNBZ830	2,000	3000	120	100W MH
30	LWP30TUDNBZ850	2,000	5000	120	100W MH

NOTES:

Manufactured by

