


- Pre-installed battery backup (880 Lumen in 4' strip and 1700 Lumen in 8' strip)
- Suitable for surface or suspension mounting
- Steel body
- Post painted soft edges
- Easy-fit polycarbonate lens
- Damp location rated
- 5-year limited warranty

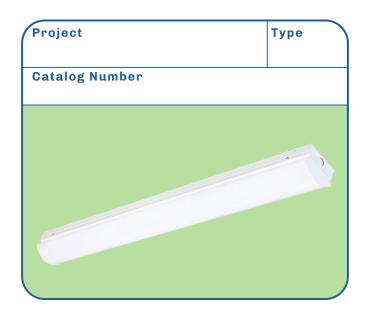

SPECIFICATIONS

Input Line Frequency	60Hz
Lamp Life (Rated)	50,000Hrs
Minimum Starting Temp	20°C
Maximum Operating temp	40°C
CRI	≥80
Dimmable	0-10V

DIMENSIONS

ST4840LLED850BK	47.5" x 4.44" x 3.56"
ST9660LLED850BK	96.0" x 4.44" x 3.56"
ST9685LLED850BK	96.0" x 4.44" x 3.56"







WATTS	MODEL NO.	LUMENS	ССТ	VOLTAGE	REPLACES
40	ST4840LLED850BK	4,400	5000	120-277	2 x32W
63	ST9660LLED850BK	<i>7,</i> 100	5000	120-277	4 x 32W
85	ST9685LLED850BK	9,000	5000	120-277	4 x 54W
NOTES:					

Manufactured by



