


LED Undercabinet

- Powder-coated finish
- Polycarbonate opal plastic diffuser
- High color rendering chip for vivid, true color
- Linkable up to 20 units
- Includes plug-in cord, hard wire connection and 6" linking wire and butt connector
- 12" linking cord (UL512LINK) sold separately
- 3-year limited warranty

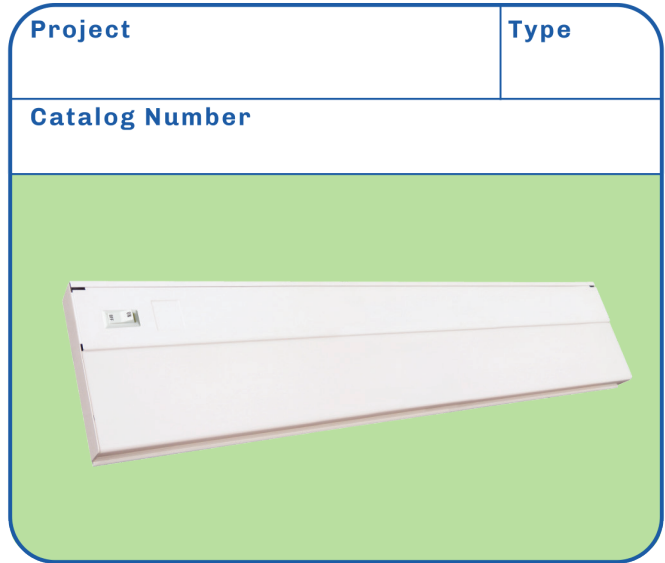

SPECIFICATIONS

Input Line Frequency _____ 60Hz
 Lamp Life (Rated) _____ 25,00Hrs
 Minimum Starting Temp _____ -20°C
 Maximum Operating temp _____ 40°C
 CRI _____ ≥90
 Dimmable _____ Triac 120V

DIMENSIONS

UL095DXX _____ 9.19" x 5" x 1.125"
 UL125DXX _____ 12.19" x 5" x 1.125"
 UL185DXX _____ 18.5" x 5" x 1.125"
 UL245DXX _____ 24.63" x 5" x 1.125"
 UL335DXX _____ 33.56" x 5" x 1.125"
 UL425DXX _____ 42.63" x 5" x 1.125"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
5	UL095DWH	250	3000	120	25W HAL
6	UL125DWH	300	3000	120	50W HAL
9	UL185DWH	500	3000	120	75W HAL
11	UL245DWH	650	3000	120	100W HAL
13	UL335DWH	750	3000	120	125W HAL
16	UL425DWH	850	3000	120	150W HAL
ACCESSORIES:		UL512LINK			
NOTES:					

Manufactured by

