


# LED Back-lit Flat Panel

- Instant-on LED
- White framed edge and even light distribution
- Multi-Watt adjustable switch (35/40/45/50)
- Multi-CCT color adjustable (3000K/3500K/4000K/5000K)
- Lumen output variable with wattage (4,375/5,000/5,625/6,250)
- Junction box for easy connection
- 5-year limited warranty

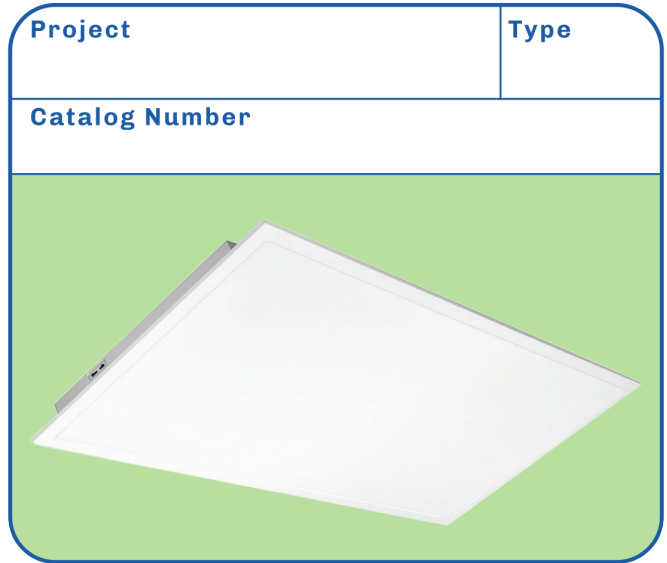

## SPECIFICATIONS

Input Line Frequency \_\_\_\_\_ 50/60Hz  
 Lamp Life (Rated) \_\_\_\_\_ 50,000Hrs  
 Minimum Starting Temp \_\_\_\_\_ -20°C  
 Maximum Operating temp \_\_\_\_\_ 40°C  
 CRI \_\_\_\_\_ ≥ 80  
 Power Factor \_\_\_\_\_ 0.90  
 THD \_\_\_\_\_ 13%  
 Dimmable \_\_\_\_\_ 10% 0-10V

## DIMENSIONS

CL3X5P24CCT \_\_\_\_\_ 47.75" x 23.74" x 1.18"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
35-50	CL3X5P24CCT	4-6K	30-50K	120-277V	2-4 x 32W
NOTES:					

Manufactured by

