


## LED Slim Watt- & Color-selectable Direct/Indirect

- White framed edge
- Low profile design
- Non-corrosive powder coated steel body
- CCT and wattage-selectable
- Optional surface-mount kit (CLSI22/CLSI24) sold separately
- Optional backup battery (CLBATBACKUP) sold separately
- 5-year limited warranty

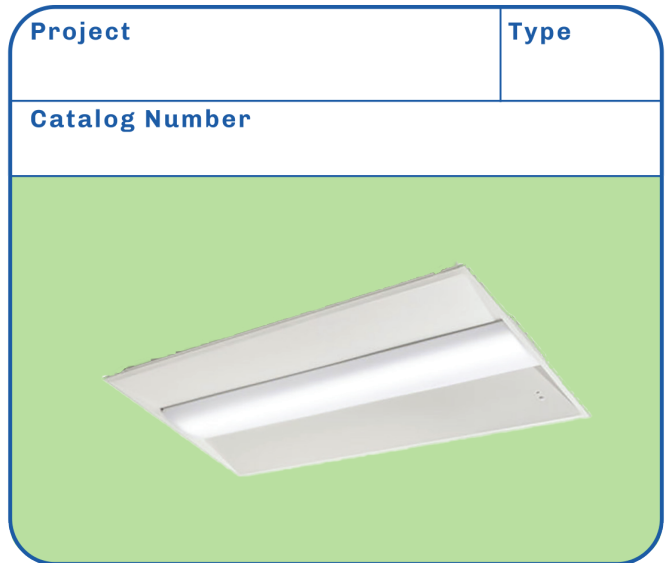

### SPECIFICATIONS

Input Line Frequency \_\_\_\_\_ 60Hz  
 Lamp Life (Rated) \_\_\_\_\_ 50,000Hrs  
 Minimum Starting Temp \_\_\_\_\_ -20°C  
 Maximum Operating temp \_\_\_\_\_ 40°C  
 Dimmable \_\_\_\_\_ 10% 0-10V

### DIMENSIONS

CL3SID22CCT \_\_\_\_\_ 23.74" x 23.74" x 1.77"  
 CL5SID24CCT \_\_\_\_\_ 47.8" x 22.56" x 3.19"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
24,36	CL3SID22CCT	3000-4500	3,4,5K	120-277	2/3 x 32W
36,42,50	CL5SID24CCT	4500-6250	3,4,5K	120-277	3/4 x 32W
ACCESSORIES:	CLBATBACKUP				
CLSI22					
CLSI24					
NOTES:					

Manufactured by

