


LED Adjustable Wall Pack w/Photo Control

- Standard with dusk-to-dawn sensor and integral J-Box body
- Heavy duty matte bronze die-cast housing with polycarbonate lens
- Incremental angle adjustment
- Suitable for wet location (IP 65)
- 5-year limited warranty

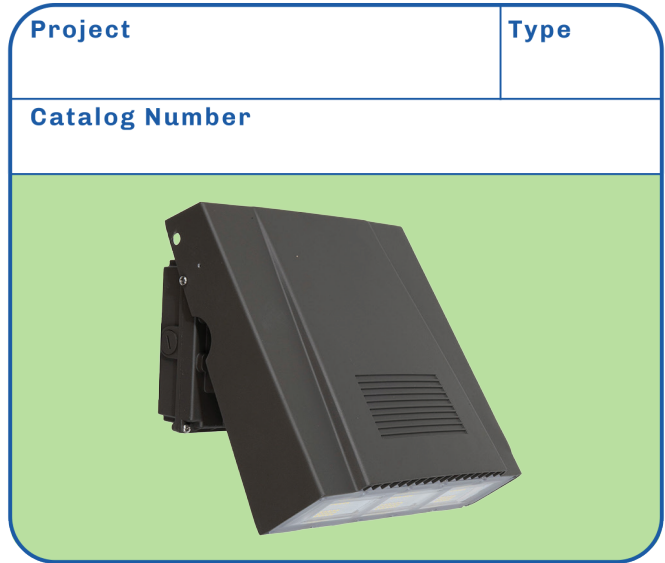

SPECIFICATIONS

Input Line Frequency _____ 60Hz
 Lamp Life (Rated) _____ 50,000Hrs
 Minimum Starting Temp _____ -20°C
 Maximum Operating temp _____ 40°C
 CRI _____ 70

DIMENSIONS

E1 WPE30/50L750 _____ 7.0" x 8.5" x 4.0"
 E1 WPE75L750 _____ 10.0" x 11.0" x 4.0"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
30	E1 WPE30L750	3,450	5000	120-277	70W MH
50	E1 WPE50L750	5,700	5000	120-277	100W MH
75	E1 WPE75L750	9,000	5000	120-277	175W MH

NOTES:

Manufactured by

energetic
Smarter lighting