


# LED Panel Variable Watts & Kelvin

- Mercury-free construction
- Standard T-grid drop ceiling installation or hang from corner anchor points using suspension cable
- Selector switch sets variable wattage and color temperature during installation
- Suitable for damp location
- 5-year limited warranty

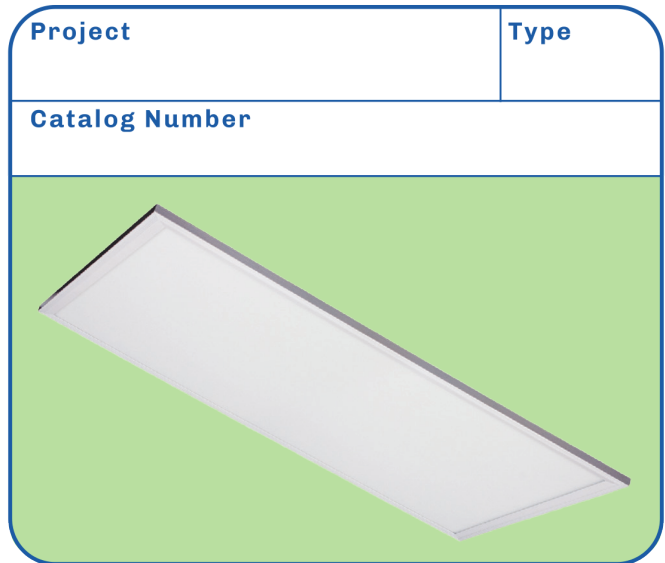

## SPECIFICATIONS

Input Line Frequency \_\_\_\_\_ 50/60Hz  
 Lamp Life (Rated) \_\_\_\_\_ 50,000Hrs  
 Minimum Starting Temp \_\_\_\_\_ -20°C  
 Maximum Operating temp \_\_\_\_\_ 50°C  
 CRI \_\_\_\_\_ 80  
 Power Factor \_\_\_\_\_ 0.9  
 THD \_\_\_\_\_ 15%  
 Dimmable \_\_\_\_\_ 10% 0-10V

## DIMENSIONS

E3PL2A35D83050 \_\_\_\_\_ 23.8" x 23.8" x 2.0"  
 E3PL4A50D83050 \_\_\_\_\_ 47.8" x 23.8" x 2.0"



WATTS	MODEL NO.	LUMENS	CCT(K)	VOLTAGE	REPLACES
20/25/30/35	E3PL2A35D83050	4,375	3/3.5/4/5	120-277	2-4 x 32W
35/40/45/50	E3PL4A50D83050	6,250	3/3.5/4/5	120-277	2-4 x 32W

NOTES:

Manufactured by

**energetic**  
Smarter lighting