


LED J- Box Downlight Variable Kelvin

- Adjustable 3000/5000K at installation
- Easy install: insert in drywall & lock in place
- 112° beam angle
- Flicker free and dimmable
- 5-year limited warranty

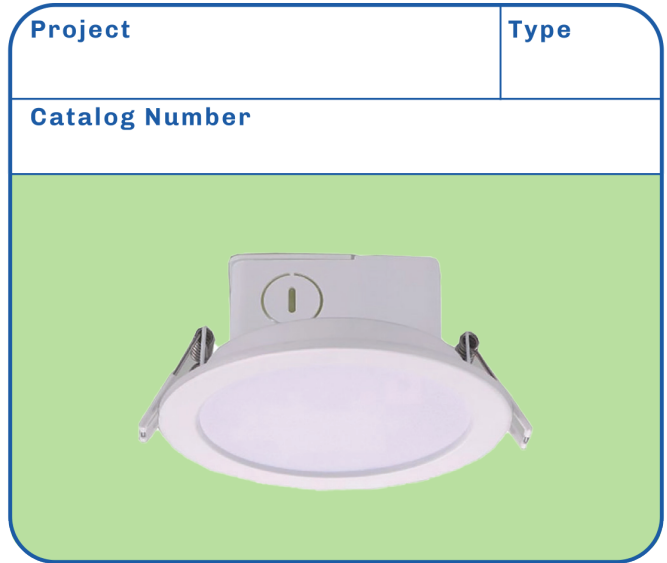

SPECIFICATIONS

Input Line Frequency _____ 60Hz
 Lamp Life (Rated) _____ 50,000Hrs
 Minimum Starting Temp _____ -20°C
 Maximum Operating temp _____ 40°C
 CRI _____ ≥90
 Dimmable _____ Triac 120V

DIMENSIONS

LC10RT4JBXCCT _____ 5.0" x 5.0" x 2.36"
 LC14RT6JBXCCT _____ 6.89" x 6.89" x 2.36"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
10	LC10RT4JBX2CCT	700	3/5000	120	60W INC
14	LC14RT6JBX2CCT	1,000	3/5000	120	100W INC

NOTES:

Manufactured by

