


LED Recessed Direct/Indirect

- Instant-on LED
- White framed edge
- Low profile design
- Non-corrosive powder coated steel body
- Includes earthquake clips
- Optional backup battery (CLBATBACKUP) sold separately - see page 80
- 5-year limited warranty

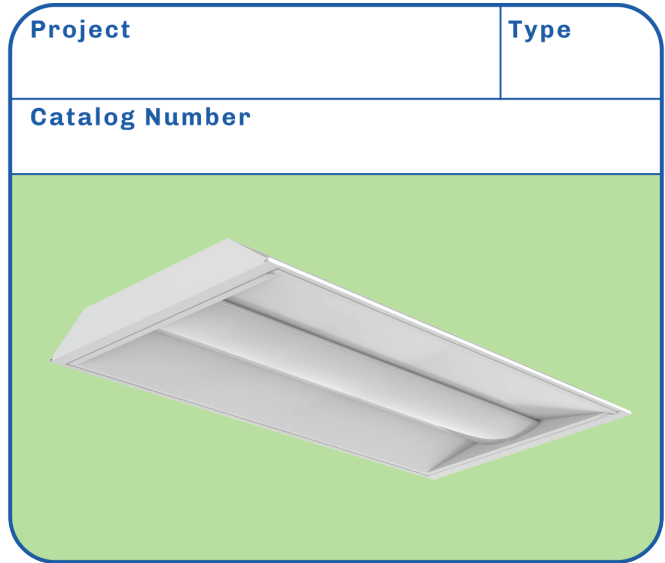

SPECIFICATIONS

Input Line Frequency _____ 60Hz
 Lamp Life (Rated) _____ 50,000Hrs
 Minimum Starting Temp _____ -20°C
 Maximum Operating temp _____ 40°C
 CRI _____ ≥80
 Power Factor _____ <0.90
 THD _____ 20%
 Dimmable _____ 10% 0-10V

DIMENSIONS

CL36IDTF22CW _____ 23.82" x 23.82" x 4.0"
 CL50IDTF24CW _____ 47.25" x 23.82" x 4.0"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
36	CL36IDTF22CW	3,600	4000	120-277	2/3 x 32W
50	CL50IDTF24CW	4,200	4000	120-277	3/4 x 32W
ACCESSORIES:		CLBATBACKUP			
NOTES:					

Manufactured by

