


LED Vapor Tight w/Battery Backup

- Pre-installed 835 Lumen battery backup
- Instant-on flat panel LED
- Polycarbonate construction with stainless steel clips
- Non-corrosive, flame and vandal resistant
- Wet location vapor tight
- 5-year limited warranty

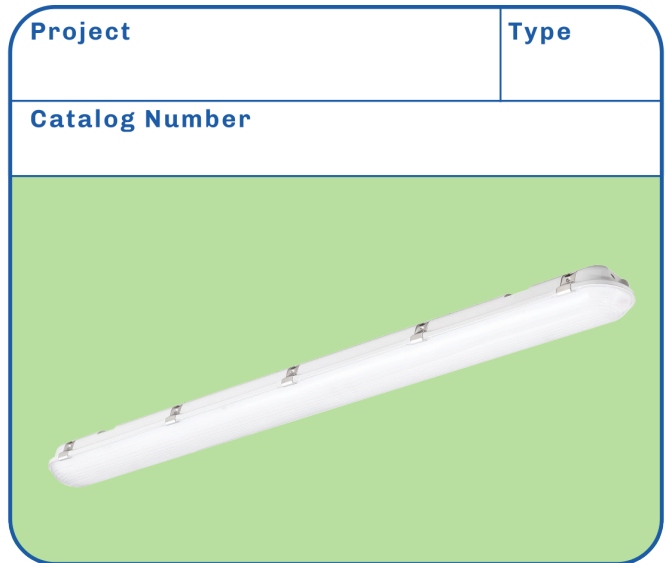

SPECIFICATIONS

Input Line Frequency _____ 60Hz
 Lamp Life (Rated) _____ 50,000Hrs
 Minimum Starting Temp _____ -20°C
 Maximum Operating temp _____ 40°C
 CRI _____ ≥80
 Power Factor _____ <.90
 THD _____ 20%
 Dimmable _____ 10% 0-10V

DIMENSIONS

C4840SVPLED850BK _____ 48.5" x 4.0" x 3.0"
 C9665SVPLED850BK _____ 96.0" x 4.0" x 3.19"



| WATTS | MODEL NO. | LUMENS | CCT | VOLTAGE | REPLACES |
|-------|------------------|--------|------|---------|-----------|
| 40 | C4840SVPLED850BK | 5,200 | 5000 | 120-277 | 2/3 x 32W |
| 65 | C9665SVPLED850BK | 8,450 | 5000 | 120-277 | 4 x 32W |

NOTES:

Manufactured by

