


LED Dual Security w/Canopy

- Uses 1/5 the wattage compared to halogen
- Pivoting arm allows directional lighting
- Instant bright high power LED
- Durable aluminum housing
- Suitable for wet locations (IP65)
- 3-year limited warranty

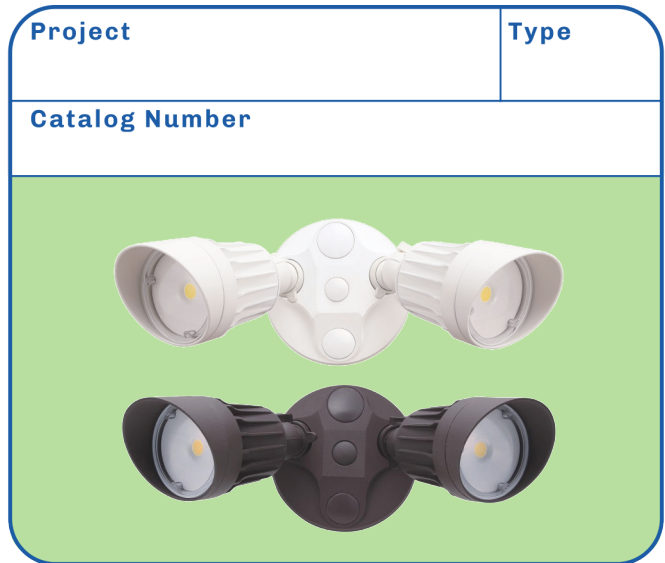

SPECIFICATIONS

Input Line Frequency _____ 60Hz
 Lamp Life (Rated) _____ 50,000Hrs
 Minimum Starting Temp _____ -20°C
 Maximum Operating temp _____ 40°C
 CRI _____ ≥80

DIMENSIONS

LF20H2XXDL _____ 13" x 4.25" x 4"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
20	LF20H2BZDL	1,640	5000	120	2 x 75W INC
20	LF20H2WHDL	1,640	5000	120	2 x 75W INC

NOTES:

Manufactured by

