


LED Vapor Tight Color-Select

- Instant-on flat panel LED
- Polycarbonate construction with stainless steel clips
- Non-corrosive, flame and vandal resistant
- Wet location vapor tight
- 5-year limited warranty

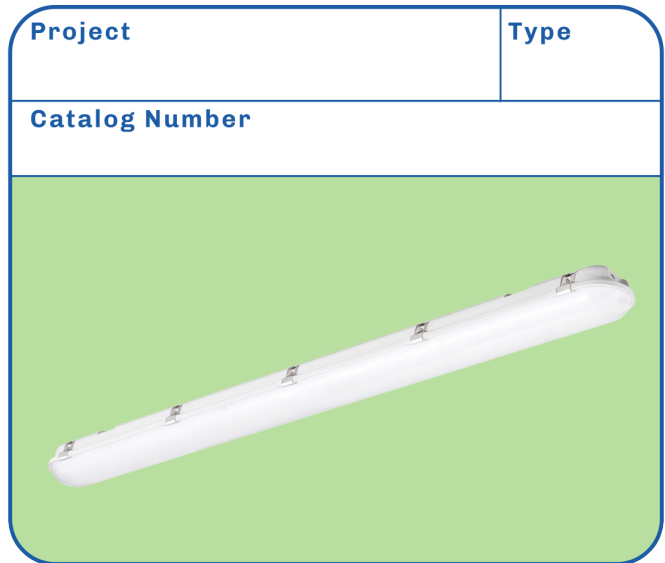

SPECIFICATIONS

Input Line Frequency _____ 60Hz
 Lamp Life (Rated) _____ 50,000Hrs
 Minimum Starting Temp _____ -20°C
 Maximum Operating temp _____ 40°C
 CRI _____ ≥80
 Power Factor _____ <.90
 THD _____ 20%
 Dimmable _____ 10% 0-10V

DIMENSIONS

C4840SVPLEDCCT _____ 47.24" x 3.84" x 3.2"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
40	C4840SVPLEDCCT	5,200	3/4/5K	120-277	2/3 x 32W
NOTES:					

Manufactured by

