


# LED Back-lit Flat Panel

- White framed edge and even light distribution
- Multi-Watt adjustable switch (2x2: 20/25/30/35 and 2x4: 35/40/45/50)
- Multi-CCT color adjustable (3000K/3500K/4000K/5000K)
- Lumen output variable with wattage (2x2: 2,500/3,125/3,750/4,375 and 2x4: 4,375/5,000/5,625/6,250)
- Junction box for easy connection
- 5-year limited warranty

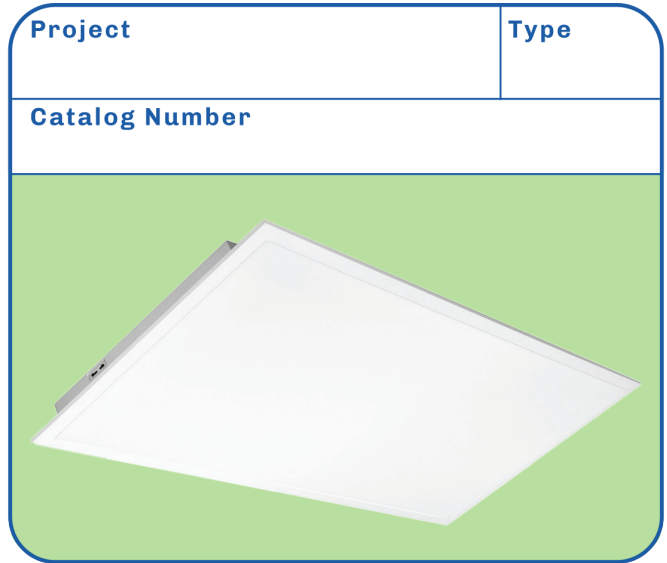

## SPECIFICATIONS

Input Line Frequency \_\_\_\_\_ 50/60Hz  
 Lamp Life (Rated) \_\_\_\_\_ 50,000Hrs  
 Minimum Starting Temp \_\_\_\_\_ -20°C  
 Maximum Operating temp \_\_\_\_\_ 40°C  
 CRI \_\_\_\_\_ ≥ 80  
 Power Factor \_\_\_\_\_ 0.90  
 THD \_\_\_\_\_ 13%  
 Dimmable \_\_\_\_\_ 10% 0-10V

## DIMENSIONS

CL2X3P22CCT \_\_\_\_\_ 23.74" x 24.74" x 1.38"  
 CL3X5P24CCT \_\_\_\_\_ 47.75" x 23.74" x 1.38"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
25-35	CL2X3P22CCT	2.5-4.4K	30-50K	120-277	1-3 x 32W
35-50	CL3X5P24CCT	4-6K	30-50K	120-277	2-4 x 32W

NOTES:

Manufactured by

