


LED Color-Select Ringed Ceiling Light

- LED module provides smooth, even light
- High color rendering chip for vivid, true color
- Nickel satin fixture with opal lens
- Environment-friendly packaging
- Limited 3-year warranty

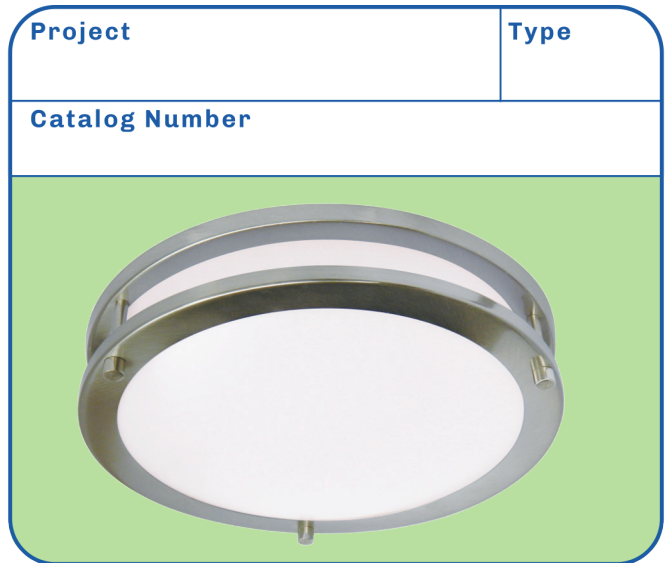

SPECIFICATIONS

Input Line Frequency _____ 60Hz
 Lamp Life (Rated) _____ 25,000Hrs
 Minimum Starting Temp _____ -20°C
 Maximum Operating temp _____ 40°C
 CRI _____ ≥90
 Dimmable _____ Triac 120V

DIMENSIONS

C15SATNSLED _____ 12" x 12" x 3"
 C23SATNSLED _____ 16" x 16" x 4"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
15	C15SATNSLED	800	3,3.5,4K	120	60W INC
23	C23SATNSLED	1,200	3,3.5,4K	120	100W INC

NOTES:

Manufactured by

