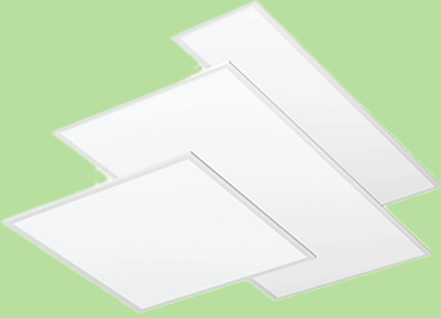


LED Back-lit Flat Panel

- Extruded aluminum lens frame with visually seamless corners and multiple knockouts
- Acrylic over-optics w/ polymer diffusing lens for uniform visual and targeted illumination
- Ultra low-profile design
- Suitable for damp location
- 5-year limited warranty

| | |
|--|-------------|
| Project | Type |
| Catalog Number | |
|  | |

SPECIFICATIONS

Input Line Frequency _____ 50/60Hz
 Lamp Life (Rated) _____ 50,000Hrs
 Minimum Starting Temp _____ -10°C
 Maximum Operating temp _____ 50°C
 CRI _____ 84
 Power Factor _____ 0.89
 THD _____ 13%
 Dimmable _____ 10% 0-10V

DIMENSIONS

E1BPL1H30D840 _____ 47.8" x 11.9" x 2.0"
 E1BPL2H30D840 _____ 23.8" x 23.8" x 2.0"
 E1BPL4H36D840 _____ 47.8" x 23.8" x 2.0"
 E1BPL4H3645 _____ 47.8" x 23.8" x 2.0"



| WATTS | MODEL NO. | LUMENS | CCT | VOLTAGE | REPLACES |
|----------|------------------|-------------|---------|-------------|-----------|
| 30 | E1BPL1H30D840 | 3,736 | 4000 | 120-347 | 2/3 x 32W |
| 30 | E1BPL2H30D840 | 3,741 | 4000 | 120-347 | 2/3 x 32W |
| 36 | E1BPL4H36D840 | 4,588 | 4000 | 120-347 | 3/4 x 32W |
| 36/40/45 | E1BPL43645D83550 | 4,630-5,360 | 3.5/4/5 | 120-277 VAC | 2-4 x 32W |

NOTES:

Manufactured by

energetic
Smarter lighting