


# LED Canopy

- heavy duty cast aluminum with thermally efficient heatsink profile
- High impact polycarbonate lens
- Easy tip in installation, and security lock bolt included
- Suitable for wet location (IP65)
- Limited 5-year warranty

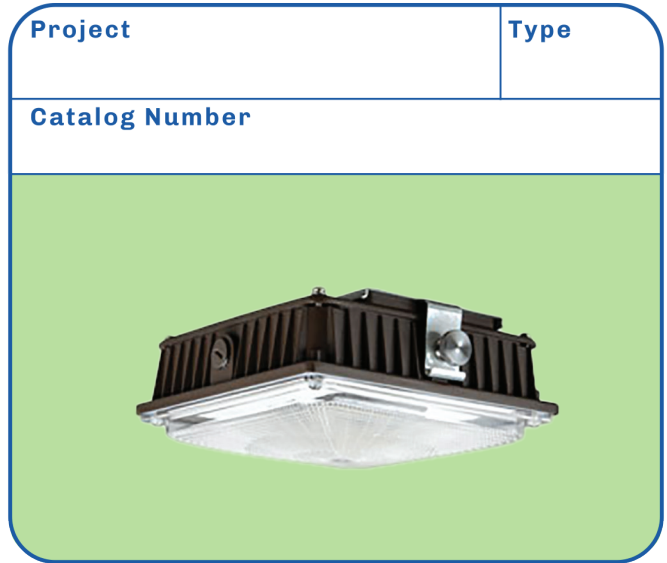

## SPECIFICATIONS

Input Line Frequency \_\_\_\_\_ 60Hz  
 Lamp Life (Rated) \_\_\_\_\_ 50,000Hrs  
 Minimum Starting Temp \_\_\_\_\_ -20°C  
 Maximum Operating temp \_\_\_\_\_ 45°C  
 CRI \_\_\_\_\_ 70  
 Dimmable \_\_\_\_\_ 10% 0-10V

## DIMENSIONS

E1CPCXX7850 \_\_\_\_\_ 9.0" x 9.0" x 3.6"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
44	E1CPC40750	6,091	5000	120-277	150W MH
65	E1CPC60750	8,948	5000	120-277	250W MH

NOTES:

Manufactured by

**energetic**  
Smarter lighting