


LED Adjustable Slim Wall Pack w/Photo Control

- Integrated dusk-to-dawn sensor with bypass cap
- Heavy duty fully sealed die-cast construction
- High transmission polycarbonate lens
- Adjustable head for 0-90° beam angle
- Suitable for wet location
- 5-year limited warranty

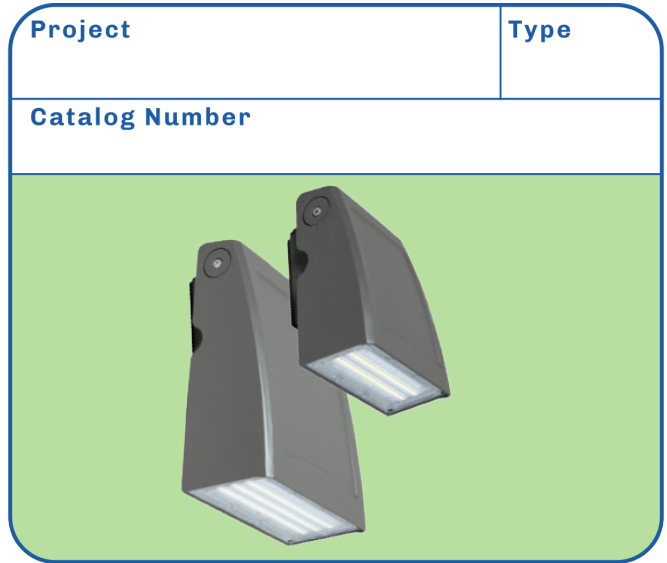

SPECIFICATIONS

Input Line Frequency _____ 60Hz
 Lamp Life (Rated) _____ 50,000Hrs
 Minimum Starting Temp _____ -40°C
 Maximum Operating temp _____ 40°C
 CRI _____ 70
 Power Factor _____ 0.9
 THD _____ 15%
 Dimmable _____ 10% 0-10V

DIMENSIONS

E2WPE35L750 _____ 6.5" x 8.5" x 4.5"
 E2WPE50L750 _____ 11" x 8.5" x 4.5"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
35	E2WPE35L750	4,550	5000	120-277	100W MH
50	E2WPE50L850	6,500	5000	120-277	150W MH

NOTES:

Manufactured by

energetic
Smarter lighting