


LED Horizontal Wall Pack w/Photo Control

- Integrated dusk-to-dawn sensor
- Heavy duty ADC12 die-cast aluminum with robust gaskets and seals to prevent moisture and insect ingress
- Borosilicate glass diffuser
- Suitable for wet location
- 5-year limited warranty

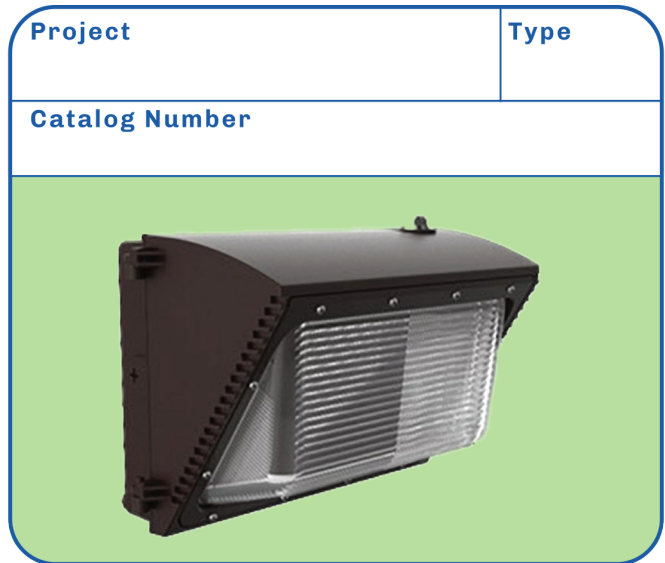

SPECIFICATIONS

Input Line Frequency _____ 60Hz
 Lamp Life (Rated) _____ 50,000Hrs
 Minimum Starting Temp _____ -40°C
 Maximum Operating temp _____ 40°C
 CRI _____ 80
 Power Factor _____ 0.9
 THD _____ 15%

DIMENSIONS

E3WPAXXL850 _____ 9" x 13" x 5.4"
 E3WPA120L850 _____ 18.3" x 9.4" x 9.3"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
28	E3WPA28L850	3,680	5000	120-277	70W MH
50	E3WPA50L850	6,500	5000	120-277	150W MH
70	E3WPA70L850	9,100	5000	120-277	250W MH
120	E3WPA120L850	15,000	5000	120-277	400W MH

NOTES:

Manufactured by

energetic
Smarter lighting