


- Single direction of illumination reduces up-light wastage
- Can be operated in luminaire with or without diffuser
- No UV or infrared radiation
- All in one operates on most ballasts or direct wire
- 5-year limited warranty
- Integrated fuse prevents overheating or melting by permanently disabling individual lamp

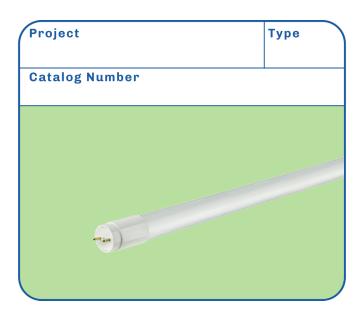

SPECIFICATIONS

Input Line Frequency	60Hz	
Lamp Life (Rated)	50,000Hrs	
Minimum Starting Temp	20°C	
Maximum Operating temp	50°C	
CRI	≥80	

DIMENSIONS

LB48T8XPNPXXX______1" x 48" x 1"





WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
15	LB48T8XPNP840	1,900	4000	120-277	32W FLUOR
15	LB48T8XPNP850	1,900	5000	120-277	32W FLUOR
NOTES:					

Manufactured by



