


# LED Commercial Recess Downlight Variable CCT

- Available in 6" (LC37RT6ARCCT) and 8" (LC40RT8ARCCT)
- Adjustable 3000/3500/4000K at installation
- Easy installation spring clips
- 90° beam angle
- IC Rated New Construction can be installed without frame
- 5-year limited warranty

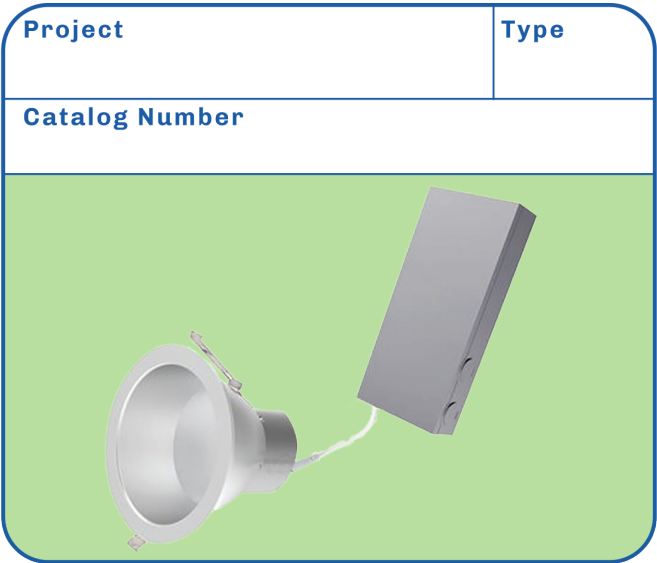

## SPECIFICATIONS

Input Line Frequency \_\_\_\_\_ 60Hz  
 Lamp Life (Rated) \_\_\_\_\_ 50,000Hrs  
 Minimum Starting Temp \_\_\_\_\_ -20°C  
 Maximum Operating temp \_\_\_\_\_ 40°C  
 CRI \_\_\_\_\_ ≥80  
 Dimmable \_\_\_\_\_ 10% 0-10V

## DIMENSIONS

LC27RT6ARCCT \_\_\_\_\_ 7.48" x 7.48" x 5.9"  
 LC40RT8ARCCT \_\_\_\_\_ 9.25" x 9.25" x 7.12"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
27	LC27RT6ARCCT	2,700	3/3.5/4	120-277	250W HID
40	LC40RT8ARCCT	4,000	3/3.5/4	120-277	400W HID

NOTES:

Manufactured by

