


# LED J- Box Downlight w/CCT-Select

- Adjustable 3000/4000/5000K (\* Pivot model LC12RT6NCBPVTCCT adjustable to 2700/3000/3500/4000/5000K)
- High efficiency 90 CRI True Color
- Flicker-free
- Knockout for Romex or Flex connection
- IC rated
- 2-year limited warranty

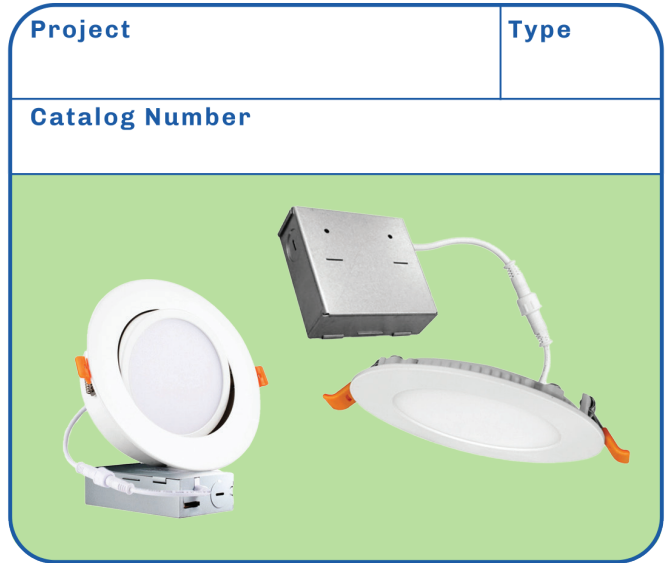

## SPECIFICATIONS

Input Line Frequency \_\_\_\_\_ 60Hz  
 Lamp Life (Rated) \_\_\_\_\_ 50,000Hrs  
 Minimum Starting Temp \_\_\_\_\_ -20°C  
 Maximum Operating temp \_\_\_\_\_ 40°C  
 CRI \_\_\_\_\_ ≥90  
 Dimmable \_\_\_\_\_ 10% Standard Triac

## DIMENSIONS

LC10RT4NCBXCCT \_\_\_\_\_ 4.8" x 4.8" x 2.08"  
 LC12RT6NCBXCCT \_\_\_\_\_ 6.81" x 6.81" x 1.73"  
 LC12RT6NCBPVTCCT \_\_\_\_\_ 7.13" x 7.13" x 2.0"  
 LC24RT8NCBXCCT \_\_\_\_\_ 8.58" x 8.58" x 1.18"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
10	LC10RT4NCBXCCT	670	3/4/5K	120	65W INC
12	LC12RT6NCBXCCT	850	3/4/5K	120	75W INC
15	LC12RT6NCBPVTCCT	900	SEE *	120	75W INC
24	LC24RT8NCBXCCT	1,800	3/4/5K	120	150W INC

NOTES:

Manufactured by

