


LED Shoebox/Flood w/Photo Control

- **MOUNTING OPTIONS MUST BE PURCHASED SEPARATELY (SEE NEXT PAGE)**
- With pre-installed receptacle and multi-volt PC
- Aluminum rust-proof body
- Type III light distribution
- Adjustable up/down with any arm/fitter
- Bi-level occupancy sensor knockout
- Suitable for wet locations (IP65)
- 5-year warranty

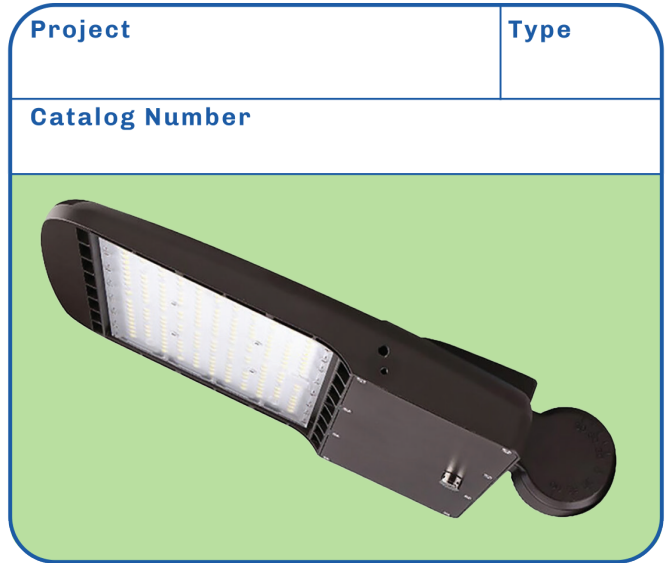

SPECIFICATIONS

Input Line Frequency _____ 50/60Hz
 Lamp Life (Rated) _____ 50,000Hrs
 Minimum Starting Temp _____ -40°C
 Maximum Operating temp _____ 45°C
 CRI _____ 70
 Dimmable _____ 10% 0-10V

DIMENSIONS

LWP1XXSB850PC _____ 12.83" x 18.70" x 3.15"
 LWP240SB850PC _____ 12.91" x 26.10" x 3.15"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
100	LWP100SB850PC	13,163	5000	120-277	300W MH
150	LWP150SB850PC	19,880	5000	120-277	500W MH
240	LWP240SB850PC	32,400	5000	120-277	750W MH

NOTES:


Manufactured by




LED Shoebox/Flood Accessories

- Die-cast aluminum with UV protected bronze finish powder coat
- Wall mount arm and round/square pole mount arm (LWPSBAWPM), slipfitter mount (LWPSBASF), and yoke mount (LWPSBAYM) each sold separately


Project	Type
Catalog Number	




LWPSBASF

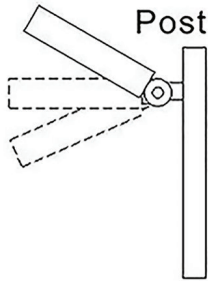

LWPSBAWPM

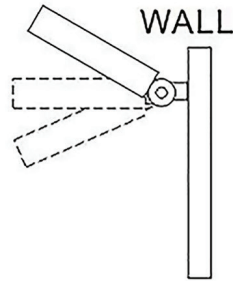

LWPSBAYM



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
-	LWPSBASF	-	-	-	-
-	LWPSBAWPM	-	-	-	-
-	LWPSBAYM	-	-	-	-
NOTES:					

Manufactured by

