


LED Shoebox/Flood

- **MOUNTING OPTIONS MUST BE PURCHASED SEPARATELY (SEE NEXT PAGE)**
- Compact one piece die-cast aluminum with UV protected bronze finish powder coat
- Type III light distribution
- Bi-level occupancy sensor knockout
- Suitable for wet locations (IP66)
- 5-year warranty

Project	Type
Catalog Number	
	

SPECIFICATIONS

Input Line Frequency _____ 50/60Hz
 Lamp Life (Rated) _____ 50,000Hrs
 Minimum Starting Temp _____ -40°C
 Maximum Operating temp _____ 46°C
 CRI _____ 70
 Dimmable _____ 10% 0-10V

DIMENSIONS

LWP1XXSBABZ850 _____ 13.11" x 13.11" x 3.15"
 LWP240SBABZ850 _____ 13.11" x 20.23" x 3.15"



WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
100	LWP100SBABZ850	13,000	5000	120-277	250W MH
150	LWP150SBABZ850	19,000	5000	120-277	400W MH
240	LWP240SBABZ850	31,200	5000	120-277	1000W MH


NOTES:

Manufactured by



LED Shoebox/Flood Accessories

- Die-cast aluminum with UV protected bronze finish powder coat
- Wall mount arm and round/square pole mount arm (LWPSBAWPM), slipfitter mount (LWPSBASF), and yoke mount (LWPSBAYM) each sold separately

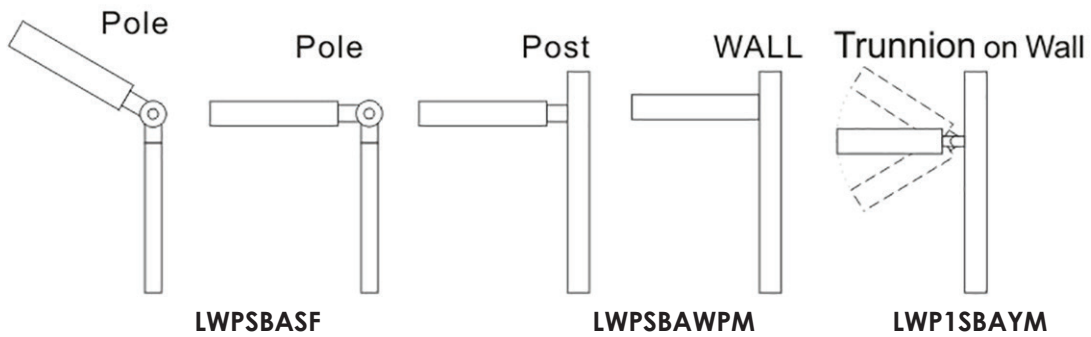

WATTS	MODEL NO.	LUMENS	CCT	VOLTAGE	REPLACES
-	LWPSBASF	-	-	-	-
-	LWPSBAWPM	-	-	-	-
-	LWPSBAYM	-	-	-	-
NOTES:					

Manufactured by

